

Simple-function Type Digital Indicators **ABS Digimatic Indicator ID-S Series**

Simple, cost-effective and easy-to-use Digimatic Indicators.
Choose long-life battery or everlasting solar powered models.

SMALL TOOL INSTRUMENTS
AND DATA MANAGEMENT



Product Based on Ease of Use, Emphasizing Cost Performance Two Versions: ID-SS, the World's First* Solar-Powered Digimatic

* Based on Mitutoyo's data valid as of August 2012.



The Nakatsugawa Plant, situated in an industrial park amid the lush greenery of Nakatsugawa city in Gifu prefecture, is a dedicated site covering work from development to production of measuring instruments such as dial indicators, test indicators, and Digimatic indicators. It was opened in 1997 as the twelfth Mitutoyo plant in Japan. Mitutoyo brand products, which are shipped with cutting-edge industrial technology and equipment, have been evaluated as first-class on a worldwide basis, and our customers know they can depend on their reliability.

The ID-S series of ABS Digimatic indicators is made up of single-function type digital indicators: the ID-SS, which is the world's first solar-powered Digimatic indicator, and the ID-SX, which is powered by a button-type battery.

These Digimatic indicators have a measuring range of 12.7 mm, and indicators that can display resolutions of 0.01 mm and 0.001 mm are included in the lineup. For the ID-SX, some of models are available and provide IP53* dust/water protection level specifications.

All the Digimatic indicators in this series are compact, with approximately the same size as a standard dial indicator. They employ large liquid crystal displays with character heights of 9 mm, and the large buttons are easy to press and make all the functions easy to operate. Furthermore, even though these models are priced competitively, the Digimatic data output function makes it possible to use them in statistical process control, networked measurement, and other similar systems.

*For more information about IP53 models, refer to page 6-7.

ce with the Minimum of Functionality atic Indicator, and the SR44 Button Battery-Powered ID-SX

Compact design

These compact Digimatic indicators are approximately the same size as a standard dial indicator, so they can easily be used to replace such indicators. The solar-powered ID-SS eliminates the need for battery replacement, so just as with dial indicators there is no fear of the instrument losing power at an inconvenient time.



Standard dial indicator

ID-SS

Large liquid crystal display

These Digimatic indicators use large liquid crystal digital displays with a large character height (9 mm) for easy visibility.



Actual size

Large pushbuttons

These Digimatic indicators feature large, easy-to-use pushbuttons that provide the user with direct access to the minimal functionality set.



ID-SS

ID-SX

ABS (absolute) sensor

These Digimatic indicators employ Mitutoyo's proprietary ABS (absolute) sensor, which makes it possible to restore the origin point even if the power is turned off. This eliminates the need to perform origin matching each time the power is turned on. Furthermore, this sensor ensures that overspeed errors do not occur, which improves reliability.

ABSOLUTE™

Plunger lifting and a rich variety of accessories

To take account of the wide application range of these indicators, we have provided three types of lifting accessories (options) to match different uses. Furthermore, we have provided a rich variety of contact points, stands, data processing-related parts, and other accessories.

Optional accessories

Lifting lever

Lifting knob

Lifting cable



Inspection certificate included as standard

- An inspection certificate on which the inspection data at the time of shipment is written is included as standard. (The inspection certificate cannot be used to acquire calibration certificates because the date of purchase cannot be specified on the inspection certificate.)
- For a fee, Mitutoyo can calibrate measuring equipment and issue a calibration certificate providing proof of traceability with the standard used during the calibration. Contact Mitutoyo for details.

CERTIFICATE OF INSPECTION 検査成績書		Certificate No. 4112363337	
Product name: Digimatic Indicator Code No. 543-7908		Model: ID-S12XB Serial No. 12144847	
Graduation: 0.001mm		Measuring span: 12.7mm Temperature: 20°C (Standard Temperature)	
Inspection standard: Mitutoyo standard			
検査項目/項目名	MPE of indication unit:µm	検査結果	Maximum Permissible error (MPE) of indication unit:µm error
① 全測長検査/Overall	3	2	A Overall (合格) 合格
② 全測長検査/Address	3	1	B Address (合格) 合格
③ 繰り返し精度/Repeatability	2	passed	C Repeatability (合格) 合格
Method of inspection: MITUTOYO (No sign)			
Judgement (判定): Passed (合格)			
*Based on JIS B 751:1999-2003			
*Traceable to NIM-J (GSI) by GSI No. 030. The accuracy error (GSI) is excluded from the specification value.			
*GSI via No. E11/21574-08/66317			
検査結果 (mm/µm)		位置 (Position/mm)	
0 UP X DOWN		0	
Mitutoyo Corporation			

ABS Solar-Powered Digimatic Indicator ID-SS **New**

SOLAR



* Patent pending in Japan,
the United States, the European Union, and China.
* Design registered in Japan,
the United States, the European Union, and China.

Solar power supply

An environmentally friendly measuring instrument that does not require batteries, eliminating the hassle and cost of battery replacement. Can operate under minimum light conditions of 40 lux-lower than the level needed inside a warehouse.

Large reserve power capacity

A large reserve of power (when fully charged) enables you to use the indicator for long periods of time under light conditions below the minimum level.
(Can be used for approx. 3.5 hours on a full charge.)

Origin recorded even if display disappears

The indicator includes an ABS (absolute) sensor that allows the previously set origin to be restored even if the display disappears due to insufficient light, making it easy to resume measurement. This feature makes ID-SS ideal for extended measurement sessions.

ABSOLUTE™

Specifications

Metric			ISO/JIS/DIN Type		ASME/ANSI/AGD Type		
Order No.	Range	Resolution	Accuracy*1			Back type	Mass
			Overall*2	Hysteresis	Repeatability		
543-500	12.7 mm	0.001 mm	0.003 mm	0.002 mm	0.002 mm	With lug	150g
543-500B						Flat	140g
543-505		0.01 mm	0.02 mm	0.02 mm	0.01 mm	With lug	150g
543-505B						Flat	140g

Inch/Metric			ISO/JIS/DIN Type		ASME/ANSI/AGD Type		
Order No.	Range	Resolution	Accuracy*1			Back type	Mass
			Overall*2	Hysteresis	Repeatability		
543-501	.5"/12.7 mm	.00005"/0.001mm	±.0001"/0.003mm	.0001"/0.002mm	.0001"/0.002mm	With lug	150g
543-501B						Flat	140g
543-502		.00005"/0.001mm	±.0001"/0.003mm	.0001"/0.002mm	.0001"/0.002mm	With lug	165g
543-502B						Flat	140g
543-506		.0005"/0.01mm	±.0010"/0.02mm	.0010"/0.02mm	.005"/0.01mm	With lug	150g
543-506B						Flat	140g
543-507		.0005"/0.01mm	±.0010"/0.02mm	.0010"/0.02mm	.005"/0.01mm	With lug	165g
543-507B						Flat	140g

*1 These values apply at 20°C, and do not include ±1 count allowance for quantization error.

*2 Overall magnification and linearity

Common specifications

Display: 6-digit LCD, sign

Contact point: Spherical tip SR = 1.5 mm (carbide tipped)

Part No. **901312** (for ISO/JIS/DIN Type)

Part No. **21BZB005** (for ASME/ANSI/AGD Type)

Measuring force: 1.5 N or lower

Usable orientation: All

Power supply: Solar cell (for indoor use)

Minimum operating light: 40lux

Reserve capacity allows a fully charged ID-SS to be used for about 3.5 hours under light conditions below the minimum level.

Charging time required depends on the environment, but it usually takes about 1.5 hours for a fully discharged ID-SS to fully recharge under light conditions of 500lux.

Maximum response speed: No limit (scan-type measurement is not supported)

Operating temperature range: 0 to 40°C

Storage temperature range: -10 to 60°C

Features

Origin set (zero-set): The display can be zeroed at any chosen position.


Direction switching: The measuring direction can be switched.

in/mm reading (inch/mm models only)

Measurement data output: These indicators have a measurement data output socket, which makes it possible to output Digimatic data to the DP-1VR mini processor or to a PC through an input tool. Furthermore, the U-WAVE measurement data wireless communication system can be used to wirelessly input measurement data to a PC.

Error warning

Dimensions

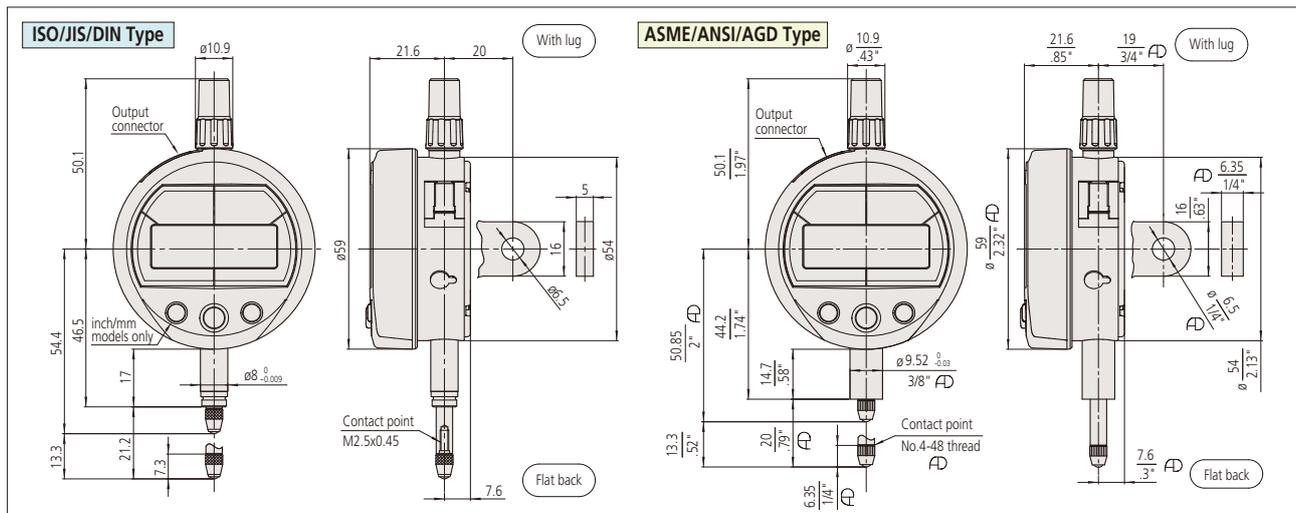

Optional accessories

• Lifting

Lifting lever

No.21EZA198 (ISO/JIS/DIN Type)

No.21EZA199 (ASME/ANSI/AGD Type)



Lifting knob

No.21EZA105 (ISO/JIS/DIN Type)

No.21EZA150 (ASME/ANSI/AGD Type)



Lifting cable (No. 540774)



- SPC connecting cables
1m (No. 905338)
2m (No. 905409)
- Data processing products
- Contact points for Mitutoyo dial indicators
- Backs for Mitutoyo standard (2 series) dial indicators
- Stands

- ID-SS can be used in standard work environments.

The following is excerpted from JIS Z9110:2010 General rules of recommended lighting levels; 5.4 Factories:

Luminance (lux)	Location (permissible work)
1500	Very detailed visual work
750	Detailed visual work; design and drawing work
500	Regular visual work such as work carried out in a factory; monitoring work such as using instrument panels and control panels
300	Administrative work carried out in a warehouse
200	Control rooms, bathrooms, and places where light manual work is carried out
150	Work such as loading, unloading, and shifting loads
100	Hallways, corridors, entrances and exits, and warehouses
50	Indoor emergency staircases

Digital Indicator with Simplified Key Functions and Reasonable price **ABS Digimatic Indicator ID-SX**



Type emphasizing cost performance

This indicator uses a button-type battery (SR44), stresses ease of use, and comes with the minimum of functionality. Indicators that can display measurements at resolutions of 0.01 mm and 0.001 mm are included in the lineup.

IP53 dust/water protection level

Some of models are also available and provides IP53 dust/water protection level specifications. See below:

543-794, 543-794B

543-795, 543-795B

543-796, 543-796B

ABS (absolute) sensor

These Digimatic indicators employ Mitutoyo's proprietary ABS (absolute) sensor, which makes it possible to restore the origin point even if the power is turned off. This eliminates the need to perform origin matching each time the power is turned on. Furthermore, this sensor ensures that overspeed errors do not occur, which improves reliability.

ABSOLUTE™

Long battery life

One button battery (SR44) provides approximately 20,000 hours of continuous use for resolution .0005"/0.01mm models.

Specifications

Metric	Order No.	Range	Resolution	Accuracy*1			Back type	Measuring force	Battery life*3	Dust/Water protection level*4	Mass	
				Overall*2	Hysteresis	Repeatability						
ISO/JIS/DIN Type	543-790	12.7 mm	0.001 mm	0.003 mm	0.002 mm	0.002 mm	With lug	1.5N or less	18,000 hours under normal use	IP42	150g	
	543-790B						Flat				140g	
	543-794		0.001 mm	0.003 mm	0.002 mm	0.002 mm	With lug	2.5N or less		IP53	155g	
	543-794B						Flat				155g	
	543-781		0.01 mm	0.02 mm	0.02 mm	0.01 mm	With lug	1.5N or less		20,000 hours under normal use	IP42	150g
	543-781B						Flat					140g

Inch/Metric	Order No.	Range	Resolution	Accuracy*1			Back type	Measuring force	Battery life*3	Dust/Water protection level*4	Mass	
				Overall*2	Hysteresis	Repeatability						
ASME/ANSI/AGD Type	543-791	.5"/12.7 mm	.00005"/0.001mm	±.0001"/0.003mm	.0001"/0.002mm	.0001"/0.002mm	With lug	1.5N or less	18,000 hours under normal use	IP42	150g	
	543-791B						Flat				140g	
	543-792		.00005"/0.001mm	±.0001"/0.003mm	.0001"/0.002mm	.0001"/0.002mm	With lug	1.5N or less		18,000 hours under normal use	IP42	165g
	543-792B						Flat					140g
	543-793		.0001"/0.001mm	±.0001"/0.003mm	.0001"/0.002mm	.0001"/0.002mm	With lug	1.5N or less		18,000 hours under normal use	IP42	165g
	543-793B						Flat					140g
	543-795		.00005"/0.001mm	±.0001"/0.003mm	.0001"/0.002mm	.0001"/0.002mm	With lug	2.5N or less	18,000 hours under normal use	IP53	155g	
	543-795B						Flat				155g	
	543-796		.00005"/0.001mm	±.0001"/0.003mm	.0001"/0.002mm	.0001"/0.002mm	With lug	2.5N or less	18,000 hours under normal use	IP53	155g	
	543-796B						Flat				155g	
	543-782		.0005"/0.01mm	±.0010"/0.02mm	.0010"/0.02mm	.0005"/0.01mm	With lug	1.5N or less	20,000 hours under normal use	IP42	150g	
	543-782B						Flat				140g	
	543-783		.0005"/0.01mm	±.0010"/0.02mm	.0010"/0.02mm	.0005"/0.01mm	With lug	1.5N or less	20,000 hours under normal use	IP42	165g	
	543-783B						Flat				140g	

*1 These values apply at 20°C, and do not include ±1 count allowance for quantization error.

*2 Overall magnification and linearity

*3 The battery life varies, depending on the number of times the Digimatic indicator is used as well as the way it is used. The values listed above are approximations.

*4 This is only valid when the data socket cover is in place. Does not apply if the cover is removed, a lifting accessory is attached, or a connecting cable is attached.

Common specifications

Display: 6-digit LCD, sign

Contact point: Spherical tip SR = 1.5 mm (carbide tipped)

part No. **901312** (for ISO/JIS/DIN Type), part No. **21BZB005** (for ASME/ANSI/AGD Type)

Usable orientation: All

Power supply: SR44, part No. **938882**

Maximum response speed: No limit (scan-type measurement is not supported)

Operating temperature range: 0 to 40°C

Storage temperature range: -10 to 60°C

Features

Origin set (zero-set): The display can be zeroed at any chosen position.


Direction switching: The measuring direction can be switched.

in/mm reading (inch/mm models only)

Measurement data output: These indicators have a measurement data output socket, which makes it possible to output measurement to the DP-1VR mini processor or to a PC through an input tool. Furthermore, the U-WAVE measurement data wireless communication system can be used to wirelessly input measurement data to a PC.

Error warning

Dimensions

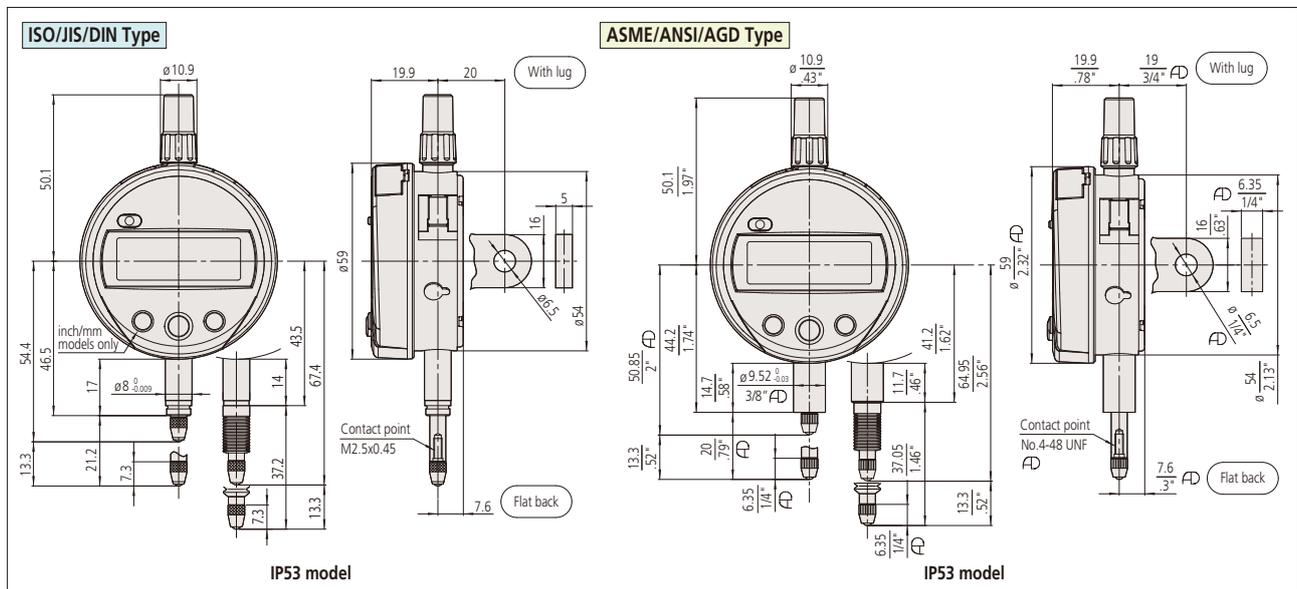

Optional accessories

Lifting

Lifting lever No. **21EZA198** (ISO/JIS/DIN Type), No. **21EZA199** (ASME/ANSI/AGD Type)

Lifting knob No. **21EZA105** (ISO/JIS/DIN Type), No. **21EZA150** (ASME/ANSI/AGD Type)

Lifting cable (No. **540774**)

• SPC connecting cables 1m (No. **905338**) 2m (No. **905409**)

• Data processing products

• Contact points for Mitutoyo dial indicators

• Backs for Mitutoyo standard (2 series) dial indicators

• Stands

IP53 dust/water protection level

Level 5: Dust protection

While complete protection against invasion of dust is not provided, protection is adequate to prevent dust amounts that would inhibit the prescribed operations and safety of the electronic equipment.

Level 3: Protection against spraying water

The product suffers no harmful effects when subjected to water sprayed at an angle of up to 60 degrees on both sides.

For details on the dust/water protection level test conditions, please refer to IEC 60529:2001 and JIS C 0920:2003.

IP code is the degree of protection against solid foreign objects and water.

Mitutoyo offers a lineup of Coolant proof type, ID-N/B series, which is Excellent resistance against oil, water, and dust in the situations that include splashing cutting fluid.



A rich variety of Digimatic indicators

- ① ID-CX: A standard digital indicator
- ② ID-N/B: A waterproof product with a slim body 35 mm wide and equipped with a large range of functions
- ③ ID-H: Product with a remote control, high measurement accuracy, and equipped with a large range of functions
- ④ ID-U: General-purpose product with a measuring range of 25.4 mm
- ⑤ ID-CRB: Product with a built-in calculation function
- ⑥ ID-CA: Product with a peak hold function
- ⑦ ID-CGB: Dedicated product designed for bore gages

Note: Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

MITUTOYO and MiCAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions.

Other product, company and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.



www.mitutoyo.com.sg | www.mitutoyo.com.my
www.mitutoyo.co.th | www.mitutoyo.co.id
www.mitutoyo.com.vn | www.mitutoyo.com.ph

Small Tools Authorized Distributor

Mitutoyo

Mitutoyo Asia Pacific Pte. Ltd.

Company Reg No. 197800892N

24 Kallang Avenue, Mitutoyo Building, Singapore 339415

Tel: (65) 6294 2211 Fax: (65) 6299 6666

E-mail: mapsg@mitutoyo.com.sg

Mitutoyo (Malaysia) Sdn. Bhd.

Mah Sing Integrated Industrial Park,
4, Jalan Utarid U5/14, Section U5,
40150 Shah Alam, Selangor, Malaysia
Tel: (60) 3-7845 9318
Fax: (60) 3-7845 9346
E-mail: mmsb@mitutoyo.com.my

Penang Branch

Tel: (60) 4-641 1998 Fax: (60) 4-641 2998
E-mail: mmsbpen@mitutoyo.com.my

Johor Branch

Tel: (60) 7-352 1626 Fax: (60) 7-352 1628
E-mail: mmsbjhr@mitutoyo.com.my

Mitutoyo (Thailand) Co., Ltd.

76/3-5, Chaengwattana Road, Kwaeng
Anusaawaree, Khet Bangkaen,
Bangkok 10220, Thailand
Tel: (66) 2-080 3500
Fax: (66) 2-521 6136
E-mail: office@mitutoyo.co.th

Chonburi Branch

Tel: (66) 2-080 3563 Fax: (66) 3-834 5788

Amata Nakorn Branch

Tel: (66) 2-080 3565 Fax: (66) 3-846 8978

PT. Mitutoyo Indonesia

Jalan Sriwijaya No.26
Desa cibatu
Kec. Cikarang Selatan
Kab. Bekasi 17530, Indonesia
Tel: (62) 21-2962 8600
Fax: (62) 21-2962 8604
E-mail: ptmi@mitutoyo.co.id

Mitutoyo Vietnam Co., Ltd.

No. 07-TT4, My Dinh - Me Tri Urban Zone,
My Dinh 1 Ward, Nam Tu Liem District,
Hanoi, Vietnam
Tel: (84) 4-3768 8963
Fax: (84) 4-3768 8960
E-mail: mvc-hn@mitutoyo.com.vn
Ho Chi Minh City Branch
Tel: (84) 8-3840 3489
Fax: (84) 8-3840 3498
E-mail: mvc-hcmc@mitutoyo.com.vn

Mitutoyo Philippines, Inc.

Unit 2103, GMV Building 2,
107 North Main Avenue,
Laguna Technopark, Biñan,
Laguna 4024, Philippines
Tel: (63) 49-544 0272
Fax: (63) 49-544 0272
E-mail: mpi@mitutoyo.com.ph