

Order Code	Description
<input checked="" type="checkbox"/> UTGCA1	PosiTector Standard with UTG CA Probe
<input type="checkbox"/> UTGCA3	PosiTector Advanced with UTG CA Probe

PosiTector <i>UTG</i> Ultrasonic Thickness Gage	Compare PosiTector Gage Bodies	
Features	Standard	Advanced
<b>NEW</b> Larger 2.8" impact resistant color touchscreen with redesigned keypad for quick menu navigation	●	
HiLo alarm—Audibly and visibly alerts when measurements exceed your specified limits	●	●
Min Scan mode—take continuous readings and record min/max thicknesses—ideal for quick inspection over a large area	●	●
A Scan—with adjustable Gain and screen capture for further analysis and documentation		●
B Scan—displays a cross sectional profile of the test material		●
Live graphing of measurement data		●
<b>NEW</b> Touchscreen keyboard for quickly renaming batches, adding notes, and more		●
<b>NEW</b> Prompted Batch Mode—create pre-defined batches with on-screen text and image prompts for each reading		●
Statistics Mode—Instantly calculate average, standard deviation, min/max thickness and number of readings while measuring	●	●
Two year warranty on body AND probe	●	●
Reading Storage Capacity	1,000 per probe	250,000 in up to 1,000 batches
Connection Options		
USB port for fast, simple connection to a PC and to supply continuous power. USB cable included.	●	●
WiFi technology wirelessly synchronizes with PosiSoft.net and downloads software updates		●
<b>Bluetooth 4.0 Technology</b> for data transfer to a mobile device running the PosiTector App or optional portable printer. <b>BLE API</b> available for integration into third-party software.		●



PosiTector UTG CA1

Removable Cabled Probe	Probe Model UTG CA	
	<b>Probe Type:</b>	5 MHz Dual Element
	<b>Thru-Paint Capability (Multiple Echo):</b>	No
	<b>*Measurement Range - Single Echo:</b>	0.040" to 5.000" 1.00 to 125.00 mm
	<b>Resolution:</b>	0.001" 0.01 mm
	<b>*Accuracy:</b>	±0.001" ±0.03 mm
*Measurement range is for carbon steel and depends upon surface condition, temperature and material.		

UTG CA Probe measures the wall thickness of materials such as steel, plastic and more. Ideal for measuring the effects of corrosion or erosion on tanks, pipes or any structure where access is limited to one side.

- 5 MHz dual element transducer with integral probe
- Automatic V-Path compensation for thin materials

©DeFelsko Corporation USA 2021. All Rights Reserved. Technical Data subject to change without notice. • PUTG.v.LW/W2107

Order Code	Description
<input checked="" type="checkbox"/> UTGCA1	PosiTector Standard with UTG CA Probe
<input type="checkbox"/> UTGCA3	PosiTector Advanced with UTG CA Probe

## All Gages Feature...

### Simple

- Pre-programmed velocities—simply select from a list of common materials or enter a custom value with ease
- SmartCouple™ mode eliminates unintentional decoupling—ensures continuous measurements on scaled or pitted surfaces—ideal for analyzing large areas using multiple passes
- **NEW** Larger 2.8" impact resistant color touchscreen with redesigned keypad for quick menu
- **NEW** On-gage help explains menu items at the touch of a button
- RESET feature instantly restores factory settings

### Durable

- **NEW** Weatherproof, dustproof, and water-resistant—IP65-rated enclosure
- **NEW** Ergonomic design with durable rubberized grip
- Shock-absorbing protective rubber holster for added impact resistance
- Two year warranty on gage body AND probe

### Accurate


- Precision transducers provide fast, accurate readings
- Certificate of Calibration showing traceability to NIST included
- Built-in temperature compensation ensures measurement accuracy
- Conforms to national and international standards including ASTM E797

### Versatile

- Selectable display languages
- **NEW** Auto rotating display with Flip Lock

### Powerful

- Min Scan mode—take continuous readings and record min/max thicknesses—ideal for quick inspection over a large area
- Continually displays/updates average, standard deviation, min/max, and number of readings while measuring
- **NEW** Screen Capture—save 100 screen images for record keeping and review
- **NEW** Instant-on feature quickly powers up the gage if recently powered down
- **NEW** Up to 30% longer battery life
- USB port for fast, simple connection to a PC and to supply continuous power. USB cable included.
- Every stored measurement is date and time stamped
- Includes PosiSoft suite of software for viewing and reporting data (see page 3) for a complete overview of these options.



### Advanced Models Feature A-Scan & B-Scan

**A-Scan** with adjustable Gain and screen capture. UTG M and UTG P probes include dual cursors to measure the distance between echoes.

**B-Scan**—displays a cross sectional profile of the test material (*shown on left*)

### Award Winning Compatibility!

PosiTector body accepts all PosiTector *UTG, 6000, 200, RTR, SPG, DPM, SST, and SHD* probes easily converting from an ultrasonic wall thickness gage to a coating thickness gage, dew point meter, surface profile gage, soluble salt tester, or hardness tester.



**Comes complete** with PosiTector gage body, UTG CA probe, couplant (ultrasonic gel), protective rubber holster, wrist strap, 3 AAA alkaline batteries, instructions, protective lens shield, convenient carrying case, Long Form Certificate of Calibration traceable to NIST or PTB, USB cable, PosiSoft Software, two (2) year warranty.

**\*SIZE:** 127 x 66 x 25.4 mm (5" x 2.6" x 1")

**\*BODY WEIGHT:** 137 g (4.9 oz.) without batteries

**CONFORMS TO:** ASTM E797

\*Size and weight are for the PosiTector gage body only and do not include the probe.


# PosiSoft® Suite of Software

Four FREE and unique ways to view and report your PosiTector and PosiTest data

## PosiSoft Desktop — PC/Mac

Powerful desktop software for downloading, viewing, printing, and archiving measurement data. No internet connection required.

- **NEW** Import readings directly from the gage via WiFi, USB, or from legacy PosiSoft desktop versions
- **NEW** Updated design and functionality
- Synchronize measurement data including readings, notes, and pictures between PosiSoft Desktop, PosiTector App and PosiSoft.net
- Import/Export Templates and Job Folders to share with other users
- **NEW** Drag and Drop **Custom Fields**—import PDF forms and overlay fields easily for automatic population of inspection and measurement data
- Report preview automatically refreshes as changes are made

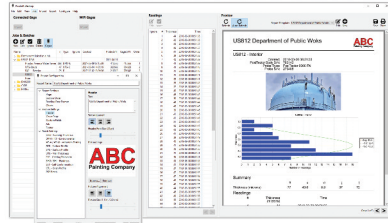

### Prompted Batch Mode


Create pre-defined batches with onscreen text and image prompts for each reading and upload to PosiTector 6000, 200, and UTG gages (*Advanced models only*).

- Ideal for ensuring a consistent measurement pattern for repetitive jobs or when specific measurement locations are required
- Create and store multiple templates for different jobs

## PosiSoft.net — Web based

A web-based application offering secure, centralized management of readings. Access your data from any web-connected device.

- Synchronize data when connected via USB or WiFi
- Synchronize measurement data including readings, notes, and pictures with PosiSoft Desktop and PosiTector App
- Securely store measurement data in the cloud and share with authorized users via a secure login

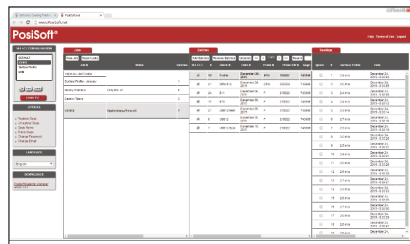

## PosiTector App — Mobile

Mobile app connects PosiTector Advanced instruments, the PosiTector SmartLink, and the PosiTest AT-A to your *iOS* or *Android* smart device.


- Auto pairing Bluetooth BLE connection
- Automatically generate user-formatted reports and share via email, text, cloud storage services like Dropbox, and more
- Export readings to PosiSoft Desktop or synchronize readings to and from PosiSoft.net for further reporting and archival options




## PosiSoft Custom PDF Report Generator

Easily create reports from your measurement data in seconds.

featured on  
PosiSoft Desktop  
PosiSoft.net  
PosiTector App

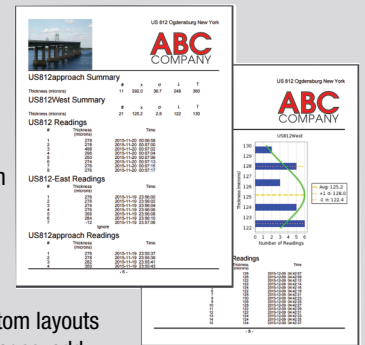


- Include inspection information such as on-site pictures, screen captures, notes, and more to communicate important details
- Create and save multiple custom layouts as templates—insert cover pages, add logos/images, and select font and point size
- Select the information to include for each product type—charts, histograms, readings, time stamps, and more
- Compile multi-batch reports from one or more probes and instrument types
- Export readings as comma separated value (.CSV) files which can easily be imported into Excel and other supporting applications

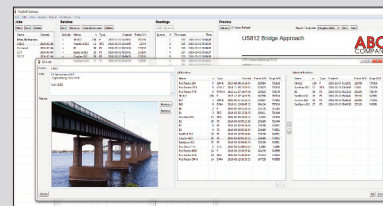

**Folders** feature consolidates batches into groups to keep measurement data organized and to quickly create multi-batch reports (not available on PosiTector App).

## PosiSoft USB Drive — Gage based



A simple gage interface to retrieve data in a manner similar to USB flash drives or cameras. No software to install or internet connection required.

- View and print readings and graphs using universal PC/Mac web browsers and file explorers
- Measurement data can be printed quickly from a formatted HTML report or exported in .CSV format for further analysis in spreadsheets
- Simple file management—Copy and paste measurement data from the PosiTector to a local folder on your computer, network folder, or cloud drive
- Access stored screen captures (snapshots) of the PosiTector display



PosiTector and PosiTest AT-A instruments can integrate with third-party software, drones, ROVs, PLCs, and robotic devices using several industry-standard communication protocols.

## PosiTector Developer Resources

including Bluetooth 4.0, WiFi, Keyboard Mode, and USB Serial

©DeFelsko Corporation USA 2021. All Rights Reserved. Technical Data subject to change without notice. • Printed in USA • PSoft.v.LW/W2104

**DeFelsko**  
Inspection Instruments

DeFelsko Corporation • 800 Proctor Ave. • Ogdensburg, New York 13669-2205 USA  
Toll Free 1-800-448-3835 • Tel: +1-315-393-4450  
techsale@defelsko.com • www.defelsko.com

Made in U.S.A.