


NIHON DOKI Pi Measure

Product specification

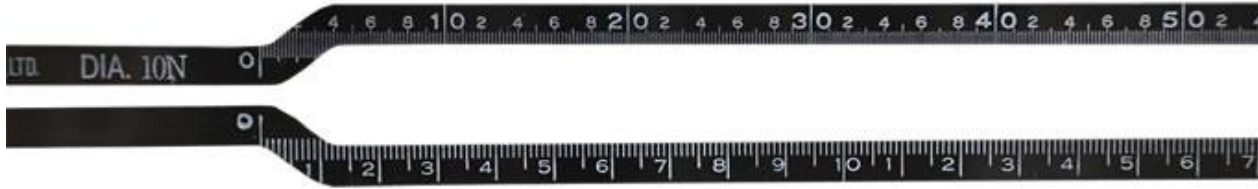

Housing

without case, but only π M-100, π M-100S, π M-200, π M-200S, π M-300, π M-300S are each in a special Aluminum case

Tension

Standard tension : 10N at 20°C

Graduation

Diameter tape is calibrated by 0.2mm, and Circumference tape by 1.0mm

Tape Width 7.0mm(Reading Part : 14mm)

Tape Thickness 0.1mm

Tape material Black Steel tape; Tape Material:SK-85

Note π M-31S·31SII, π M-51S·51SII, π M-100S, π M-200S, π M-300S : Diameter Calibration only
A-31,51,100,200,300 : Both Diameter and Circumference Calibration

Model numbers

| Model No. | Measurement Range(Diameter) | Measurement Range(Circumference) | Remark |
|----------------|-----------------------------|----------------------------------|---------------------|
| π M- 31S | 30mm - 100mm | N/A (Not Available) | |
| π M- 31SII | 30mm - 100mm | N/A (Not Available) | Different direction |
| π M- 31 | 30mm - 100mm | 100mm - 310mm | |
| π M- 51S | 30mm - 160mm | N/A (Not Available) | |
| π M- 51SII | 30mm - 160mm | N/A (Not Available) | Different direction |
| π M- 51 | 30mm - 160mm | 100mm - 510mm | |
| π M-100 | 30mm - 330mm | 100mm - 1000mm | With Case |
| π M-200 | 30mm - 650mm | 100mm - 2000mm | With Case |
| π M-300 | 30mm - 1000mm | 100mm - 3000mm | With Case |
| π M-100S | 30mm - 330mm | N/A (Not Available) | With Case |
| π M-200S | 30mm - 650mm | N/A (Not Available) | With Case |
| π M-300S | 30mm - 1000mm | N/A (Not Available) | With Case |