


Optional accessories

Interchangeable jaws

SPECIFICATIONS

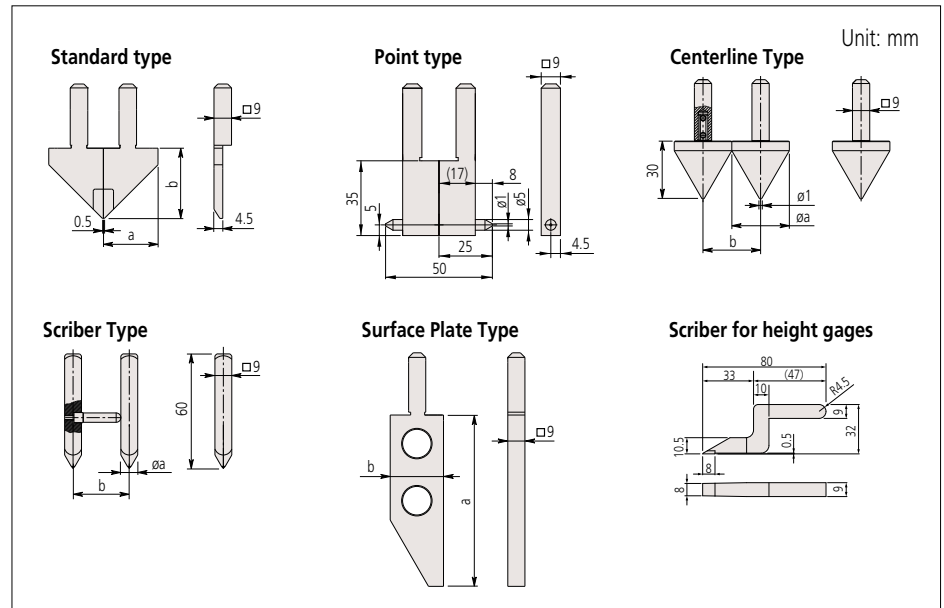

Standard Type

Code No.	Components	a	b
07CZA056	Right (07CAA044), Left (07CAA045)	28 mm (1.1 in)	36 mm (1.2 in)

Note: 1 set

Point Type

Code No.	Components	a	b
07CZA058	07CZA041x2 pcs.	25 mm	50 mm
07CZA059	07CZA048x2 pcs.	1 in	2 in

Centerline Type

Code No.	Components	a	b
07CZA057	07CZA039x2 pcs.	30 mm	30 mm
07CZA060	07CZA047x2 pcs.	1.2 in	1.2 in

Scriber Type

Code No.	Components	a	b
07CZA055	Right (07CZA042), Left (07CZA043)	8 mm	30 mm
07CZA061	Right (07CZA042), Left (07CZA049)	0.31 in	1.2 in

Surface Plate Type

Code No.	a	b
07CZA044	90 mm (3.5 in)	28 mm (1.1 in)

Note: Note that the error arising from the combination of surface plates is outside the scope of accuracy guarantee.

Scriber for height gages

Code No.
07GZA000

Type	Applicable calipers	Range	Maximum permissible error*	
			EMPE	SMPE
Standard type	552-181-10 (552-191-10)	0 - 450 mm (0 - 18 in)	±0.06 mm (±0.0025 in)	
	552-182-10 (552-192-10)	0 - 600 mm (0 - 24 in)	±0.07 mm (±0.0030 in)	
	552-183-10 (552-193-10)	0 - 1000 mm (0 - 40 in)	±0.07 mm (±0.0030 in)	
	552-184-10 (552-194-10)	0 - 1500 mm (0 - 60 in)	±0.11 mm (±0.0045 in)	
	552-185-10 (552-195-10)	0 - 2000 mm (0 - 80 in)	±0.14 mm (±0.0055 in)	
Point type	552-181-10 (552-191-10)	Inside: 50.1 - 500 mm (2.004 - 20 in) Outside: 0 - 450 mm (0 - 18 in)	— ±0.09 mm (±0.0035 in)	±0.09 mm (±0.0035 in)
	552-182-10 (552-192-10)	Inside: 50.1 - 650 mm (2.004 - 26 in) Outside: 0 - 600 mm (0 - 24 in)	— ±0.09 mm (±0.0035 in)	±0.09 mm (±0.0035 in)
	552-183-10 (552-193-10)	Inside: 50.1 - 1050 mm (2.004 - 42 in) Outside: 0 - 1000 mm (0 - 40 in)	— ±0.10 mm (±0.0040 in)	±0.10 mm (±0.0040 in)
	552-184-10 (552-194-10)	Inside: 50.1 - 1550 mm (2.004 - 62 in) Outside: 0 - 1500 mm (0 - 60 in)	— ±0.14 mm (±0.0055 in)	±0.14 mm (±0.0055 in)
	552-185-10 (552-195-10)	Inside: 50.1 - 2050 mm (2.004 - 82 in) Outside: 0 - 2000 mm (0 - 80 in)	— ±0.17 mm (±0.0070 in)	±0.17 mm (±0.0070 in)
	552-181-10 (552-191-10)	30.1 - 480 mm (1.204 - 19.2 in)	±0.08 mm (±0.0030 in)	±0.08 mm (±0.0030 in)
	552-182-10 (552-192-10)	30.1 - 630 mm (1.204 - 25.2 in)		
	552-183-10 (552-193-10)	30.1 - 1030 mm (1.204 - 41.2 in)		
	552-184-10 (552-194-10)	30.1 - 1530 mm (1.204 - 61.2 in)		
	552-185-10 (552-195-10)	30.1 - 2030 mm (1.204 - 81.2 in)		
Centerline type	552-181-10 (552-191-10)	30.1 - 480 mm (1.204 - 19.2 in)	±0.11 mm (±0.0045 in)	±0.11 mm (±0.0045 in)
	552-182-10 (552-192-10)	30.1 - 630 mm (1.204 - 25.2 in)		
	552-183-10 (552-193-10)	30.1 - 1030 mm (1.204 - 41.2 in)		
	552-184-10 (552-194-10)	30.1 - 1530 mm (1.204 - 61.2 in)		
	552-185-10 (552-195-10)	30.1 - 2030 mm (1.204 - 81.2 in)		
Scriber type	552-181-10 (552-191-10)	30.1 - 480 mm (1.204 - 19.2 in)	±0.15 mm (±0.0060 in)	±0.15 mm (±0.0060 in)
	552-182-10 (552-192-10)	30.1 - 630 mm (1.204 - 25.2 in)		
	552-183-10 (552-193-10)	30.1 - 1030 mm (1.204 - 41.2 in)		
	552-184-10 (552-194-10)	30.1 - 1530 mm (1.204 - 61.2 in)		
	552-185-10 (552-195-10)	30.1 - 2030 mm (1.204 - 81.2 in)		
Surface plate type + Scriber type for height gages	552-181-10 (552-191-10)	0 - 450 mm (0 - 17.7 in)	±0.10 mm (±0.0040 in)	±0.10 mm (±0.0040 in)
	552-182-10 (552-192-10)	0 - 600 mm (0 - 23.7 in)	±0.11 mm (±0.0045 in)	
	552-183-10 (552-193-10)	0 - 1000 mm (0 - 39.4 in)	±0.15 mm (±0.0060 in)	
	552-184-10 (552-194-10)	0 - 1500 mm (0 - 59.4 in)	±0.18 mm (±0.0070 in)	
	552-185-10 (552-195-10)	0 - 2000 mm (0 - 79.6 in)	±0.20 mm (±0.0080 in)	
Surface plate type + Point type	552-181-10 (552-191-10)	Outside: 0 - 450 mm (0 - 18 in)	±0.12 mm (±0.0050 in)	±0.12 mm (±0.0050 in)
	552-182-10 (552-192-10)	Outside: 0 - 600 mm (0 - 24 in)	±0.13 mm (±0.0055 in)	
	552-183-10 (552-193-10)	Outside: 0 - 1000 mm (0 - 40 in)	±0.17 mm (±0.0070 in)	
	552-184-10 (552-194-10)	Outside: 0 - 1500 mm (0 - 60 in)	±0.20 mm (±0.0080 in)	
	552-185-10 (552-195-10)	Outside: 0 - 2000 mm (0 - 80 in)	±0.20 mm (±0.0080 in)	
Surface plate type + Centerline type	552-181-10 (552-191-10)	15.1 - 465 mm (0.6 - 18.6 in)	±0.11 mm (±0.0045 in)	±0.11 mm (±0.0045 in)
	552-182-10 (552-192-10)	15.1 - 615 mm (0.6 - 24.6 in)		
	552-183-10 (552-193-10)	15.1 - 1015 mm (0.6 - 40.6 in)		
	552-184-10 (552-194-10)	15.1 - 1515 mm (0.6 - 60.6 in)		
	552-185-10 (552-195-10)	15.1 - 2015 mm (0.6 - 80.6 in)		

() : Inch/Metric models

Note: The values described in the above table are MPE values when attached to a caliper.