# MeasurLink®ENABLED ABSOLUTE™

## **ABSOLUTE Digimatic Height Gage SERIES 570** — with Ergonomic Base

• Single column, Digimatic Height Gage entry model with large display and bottom for good operability.

smooth vertical movement.

• The highly rigid pillars and large clamp levers provide smooth and reliable workability.




## **SPECIFICATIONS**

Order No.	Range (mm)	Resolution (mm)	Maximum permissible error Емре (mm)*	Max. response speed	Mass (kg)
570-402	0 - 300	0.01	±0.03	Unlimited	4.6
570-404	0 - 600	0.01	±0.05		6.4
Inch/Metric					

Order No.	Range	Resolution	Maximum permissible error Empe*	Max. response speed	Mass (kg)
570-412	0 to 12 in/0 to 300 mm	0.0005 :- /	±0.0015 in/±0.03 mm	Unlimited	4.6
570-413	0 to 18 in/0 to 450 mm	0.0005 in/ 0.01 mm	±0.0020 in/±0.05 mm		5.9
570-414	0 to 24 in/0 to 600 mm	0.01 111111			6.4

Standard Accessories: Scriber clamp **05GZA033**, Scriber **07GZA000** 

## **DIMENSIONS**

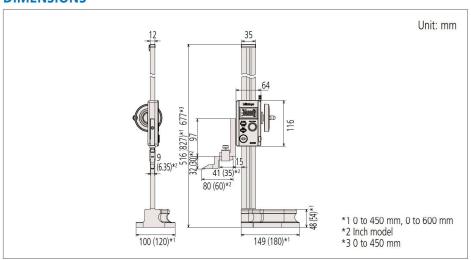

#### Measurement example



#### **Functions**

- Origin-setting: Any convenient reference surface, such as a surface plate, etc., can be stored as the absolute origin point.
- Absolute measurement: After power is turned ON, measurement can be started without zero-setting if origin-setting was previously performed. Absolute origin position can be changed by ORIGIN button.
- Incremental measurement: Allows origin setting at any arbitrary position. In this case, the origin point is not stored after turning off the power.
- Data hold Display value can be held.

  • Data output:
- Allows integration into statistical process control and measurement systems. (Refer to page A-3.)
- Low-voltage alert: Low-voltage alert: If the battery voltage becomes low, a "B" appears in the display to alert the user before measurement is no longer possible so that the battery can be changed in good time.

#### **Optional Accessories**

Order No.	Туре	Description	
905338	F	Connecting cables for IT/DP/MUX (1 m)	
905409	F	Connecting cables for IT/DP/MUX (2 m)	
06AFM380F	F	USB Input Tool Direct (2 m)	
02AZD790F	F	Connecting cables for U-WAVE-T (160 mm)	
902053	_	Clamp (with dovetail groove)*	
953638	-	Holding bar*	

\* For mounting test indicators, etc. (Refer to page F-67 for details.)



<sup>\*</sup> Maximum permissible error, EMPE is the term (notation) used in JIS B 7517: 2018, revised based on ISO/TR 14253-6: 2012.