

TSP

T スパイラルタップ


T Spiral Tap

切削条件 Cutting Condition → C-56

HSS-E **43.5°**
工具材料 ねじれ角

●止り穴のねじ加工に用いる汎用タップです。

This is a general spiral tap for tapping blind holes.

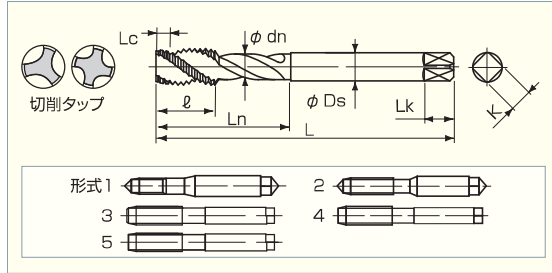

LIST 6904

オーダー方法 **TSP** 記号

単位 (Unit) : mm

記号 Code No.	呼び Thread Size	食付 (P) Lc (P)	等級 TAP Limit	全長 L	ねじ長 ℓ	溝数 Flutes	シャンク径 Ds	首下長さ Ln	首径 dn	形式 Type	在庫 Stock	参考価格 (円) Price (¥)
2M0.4	M2 × 0.4	2.5	GT3	40	8.0	3	3.0	15	2.0	1	●	1,790
2.3M0.4	M2.3 × 0.4	2.5	GT3	42	9.5	3	3.0	15	2.3	1	●	1,600
2.5M0.45	M2.5 × 0.45	2.5	GT3	44	9.5	3	3.0	16	2.5	1	●	1,410
2.6M0.45	M2.6 × 0.45	2.5	GT3	44	9.5	3	3.0	16	2.6	1	●	1,250
3M0.5	M3 × 0.5	2.5	GT6	46	5.0	3	4.0	18	2.3	2	●	996
3.5M0.6	M3.5 × 0.6	2.5	GT6	48	5.0	3	4.0	18	2.7	2	●	1,080
4M0.7	M4 × 0.7	2.5	GT6	52	7.0	3	5.0	20	3.05	2	●	952
5M0.8	M5 × 0.8	2.5	GT6	60	8.0	3	5.5	22	3.9	2	●	977
6M1	M6 × 1	2.5	GT6	62	10.0	3	6.0	25	4.7	2	●	1,050
6M0.75	M6 × 0.75	2.5	GT6	62	10.0	3	6.0	25	4.7	2	●	1,420
7M1	M7 × 1	2.5	GT6	65	10.0	3	6.2	26	5.7	4	●	1,380
8M1.25	M8 × 1.25	2.5	GT7	70	12.0	3	6.2	34	6.0	3	●	1,520
8M1	M8 × 1	2.5	GT7	70	12.0	3	6.2	34	6.0	3	●	1,890
10M1.5	M10 × 1.5	2.5	GT7	75	15.0	3	7.0	39	6.8	3	●	1,920
10M1.25	M10 × 1.25	2.5	GT7	75	15.0	3	7.0	39	6.8	3	●	1,920
10M1	M10 × 1	2.5	GT7	75	15.0	3	7.0	39	6.8	3	●	2,400
12M1.75	M12 × 1.75	2.5	GT8	82	17.0	3	8.5	43	8.3	5	●	2,660
12M1.5	M12 × 1.5	2.5	GT8	82	17.0	3	8.5	43	8.3	5	●	2,660
12M1.25	M12 × 1.25	2.5	GT8	82	17.0	3	8.5	43	8.3	5	●	2,660
14M2	M14 × 2	2.5	GT8	88	20.0	3	10.5	44	10.3	4	●	3,700
14M1.5	M14 × 1.5	2.5	GT8	88	20.0	3	10.5	44	10.3	4	●	3,700
16M2	M16 × 2	2.5	GT8	95	20.0	3	12.5	50	12.3	4	●	4,930
16M1.5	M16 × 1.5	2.5	GT8	95	20.0	3	12.5	50	12.3	4	●	4,930
18M2.5	M18 × 2.5	2.5	GT9	100	25.0	3	14.0	56	13.8	4	●	6,730
18M1.5	M18 × 1.5	2.5	GT8	100	25.0	3	14.0	56	13.8	4	●	6,730
20M2.5	M20 × 2.5	2.5	GT9	105	25.0	4	15.0	57	14.8	4	●	8,730
20M1.5	M20 × 1.5	2.5	GT8	105	25.0	4	15.0	57	14.8	4	●	8,730
22M2.5	M22 × 2.5	2.5	GT9	115	25.0	4	17.0	62	16.8	4	●	11,400
22M1.5	M22 × 1.5	2.5	GT8	115	25.0	4	17.0	62	16.8	4	●	11,400
24M3	M24 × 3	2.5	GT9	120	30.0	4	19.0	67	18.8	4	●	14,200
24M1.5	M24 × 1.5	2.5	GT8	120	30.0	4	19.0	67	18.8	4	●	14,200
27M3	M27 × 3	2.5	GT9	130	30.0	4	20.0	67	19.8	4	●	20,100
27M1.5	M27 × 1.5	2.5	GT8	130	30.0	4	20.0	67	19.8	4	●	20,100
30M3.5	M30 × 3.5	2.5	GT9	135	35.0	4	23.0	72	22.8	4	●	25,800
30M1.5	M30 × 1.5	2.5	GT8	135	35.0	4	23.0	72	22.8	4	●	25,800

・形式 1 ~ 2 は突出しセンタ Type 1 ~ 2 with External Centre

新商品

超硬ドリル

ハイスドリル

タップ

超硬
エンドミル

ハイス
エンドミル

切断工具

パップ・
セット商品
その他

精密工具

技術資料
索引